SUNPOWER®

MORE ENERGY. FOR LIFE.™

E-SERIES COMMERCIAL SOLAR PANELS

- **20.4% efficiency**
  Captures more sunlight and generates more power than conventional panels.
- **High performance**
  Delivers excellent performance in real world conditions, such as high temperatures, could and low light.[1, 2, 3]
- **Commercial grade**
  Optimized to maximize returns and energy production, the E-Series panel is a bankable solution for commercial solar applications.

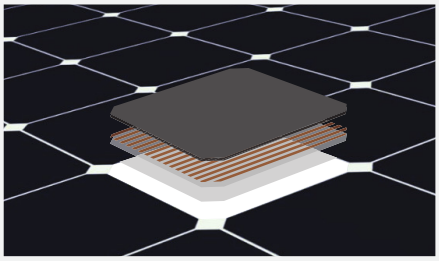

Maxeon® Solar Cells: Fundamentally better.
Engineered for performance, designed for reliability.

Engineered for peace of mind

Designed to deliver consistent, trouble-free energy over a very long lifetime.[4,5]

Designed for reliability

The SunPower® Maxeon Solar Cell is the only cell built on a solid copper foundation. Virtually impervious to the corrosion and cracking that degrade Conventional Panels.[4,5]

#1 Ranked in Fraunhofer durability test.[10]
100% power maintained in Atlas 25+ comprehensive PVDI Durability test.[11]

HIGH PERFORMANCE & EXCELLENT RELIABILITY

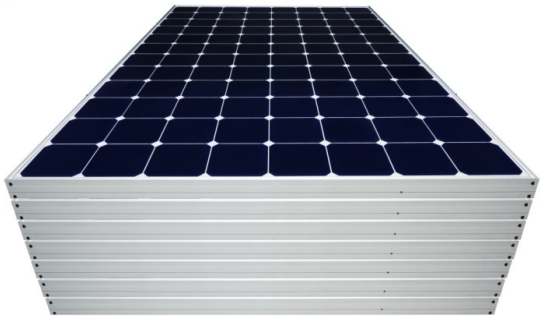

E20 SERIES

E20 - 327 PANELS

HIGH EFFICIENCY[6]

Generate more energy per square foot

E-Series commercial panels convert more sunlight to electricity producing 36% more power per panel,[1] and 60% more energy per square foot over 25 years.[3,4]

HIGH ENERGY PRODUCTION[7]

Produce more energy per rated watt

More energy to power your operations. High year one performance delivers 7-9% more energy per rated watt.[3] This advantage increases over time, producing 20% more energy over the first 25 years to meet your needs.[4]

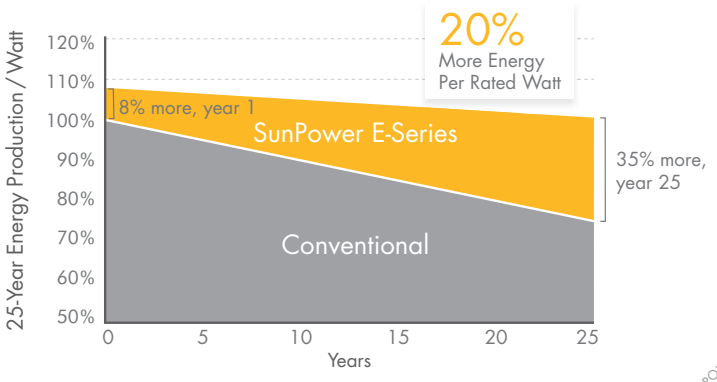

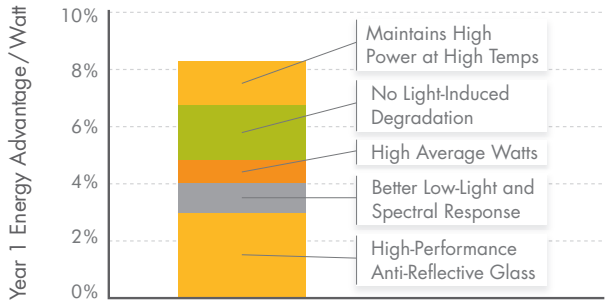

SUNPOWER 1ST PLACE 2012 PHOTON MODULE FIELD TEST

SUNPOWER®

MORE ENERGY. FOR LIFE.™

E-SERIES COMMERCIAL SOLAR PANELS

SUNPOWER OFFERS THE BEST COMBINED POWER AND PRODUCT WARRANTY

POWER WARRANTY

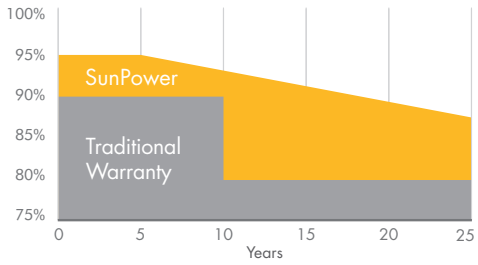

More guaranteed power: 95% for first 5 years, -0.4%/yr. to year 25. [8]

PRODUCT WARRANTY

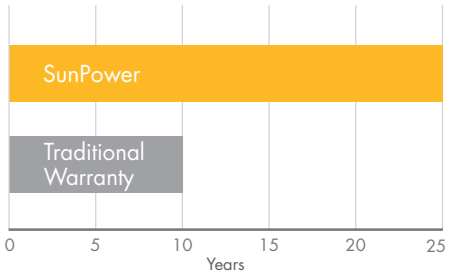

Combined Power and Product Defect 25 year coverage that includes panel replacement costs. [9]

ELECTRICAL DATA	E20-327-COM	E19-310-COM
Nominal Power[12] (Pnom)	327 W	310 W
Power Tolerance	+5/–3%	+5/–3%
Avg. Panel Efficiency[13]	20.4%	19.3%
Rated Voltage (Vmpp)	54.7 V	54.7 V
Rated Current (Impp)	5.98 A	5.67 A
Open-Circuit Voltage (Voc)	64.9 V	64.4 V
Short-Circuit Current (Isc)	6.46 A	6.05 A
Maximum System Voltage	1000 V UL ; 1000 V IEC	
Maximum Series Fuse	20 A	
Power Temp Coef. (Pmpp)	–0.38% / °C	
Voltage Temp Coef. (Voc)	–176.6 mV / °C	
Current Temp Coef. (Isc)	3.5 mA / °C	

OPERATING CONDITION AND MECHANICAL DATA	
Temperature	– 40°F to +185°F (– 40°C to +85°C)
Max load	Wind: 50 psf, 2400 Pa, 245 kg/m² front & back Snow: 112 psf, 5400 Pa, 550kg/m² front
Impact resistance	1 inch (25 mm) diameter hail at 52 mph (23 m/s)
Appearance	Class B
Solar Cells	96 Monocrystalline Maxeon Gen II Cells
Tempered Glass	High Transmission Tempered Anti-Reflective
Junction Box	IP-65 Rated
Connectors	MC4 Compatible
Frame	Class 2 silver anodized
Weight	41 lbs (18.6 kg)

TESTS AND CERTIFICATIONS	
Standard tests	UL 1703, IEC 61215, IEC 61730
Quality tests	ISO 9001:2008, ISO 14001:2004
EHS Compliance	RoHS, OHSAS 18001:2007, lead-free
Ammonia test	IEC 62716
Salt Spray test	IEC 61701 (passed maximum severity)
PID test	Potential-Induced Degradation free: 1000V [10]
Available listings	CEC, JET, KEMCO, MCS, FSEC, CSA, UL, TUV

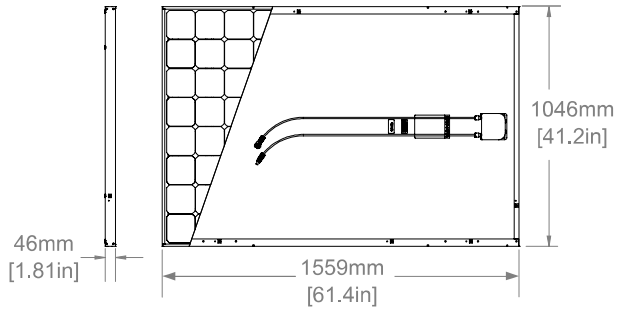

REFERENCES:

1 All comparisons are SPR-E20-327 vs. a representative conventional panel: 240W, approx. 1.6 m², 15% efficiency.
2 PVEvolution Labs "SunPower Shading Study," Feb 2013.
3 Typically 7-9% more energy per watt, BEW/DNV Engineering "SunPower Yield Report," Jan 2013.
4 SunPower 0.25%/yr degradation vs. 1.0%/yr conv. panel. Campeau, Z. et al. "SunPower Module Degradation Rate," SunPower white paper, Feb 2013; Jordan, Dirk "SunPower Test Report," NREL, Oct 2012.
5 "SunPower Module 40-Year Useful Life" SunPower white paper, Feb 2013. Useful life is 99 out of 100 panels operating at more than 70% of rated power.
6 Out of all 2600 panels listed in Photon International, Feb 2012.
7 8% more energy than the average of the top 10 panel companies tested in 2012 (151 panels, 102 companies), Photon International, March 2013.
8 Compared with the top 15 manufacturers. SunPower Warranty Review, Feb 2013.
9 Some exclusions apply. See warranty for details.
10 5 of top 8 panel manufacturers were tested by Fraunhofer ISE, "PV Module Durability Initiative Public Report," Feb 2013.
11 Compared with the non-stress-tested control panel. Atlas 25+ Durability test report, Feb 2013.
12 Standard Test Conditions (1000 W/m² irradiance, AM 1.5, 25° C).
13 Based on average of measured power values during production.

See http://www.sunpowercorp.com/facts for more reference information.
For further details, see extended datasheet: www.sunpowercorp.com/datasheets Read safety and installation instructions before using this product.

© March 2013 SunPower Corporation. All rights reserved. SUNPOWER, the SUNPOWER logo, MAXEON, MORE ENERGY. FOR LIFE., and SIGNATURE are trademarks or registered trademarks of SunPower Corporation. Specifications included in this datasheet are subject to change without notice.

Designed in California
sunpowercorp.com

Document # 505701 Rev A /LTR_EN

ADVANCED ENERGY®

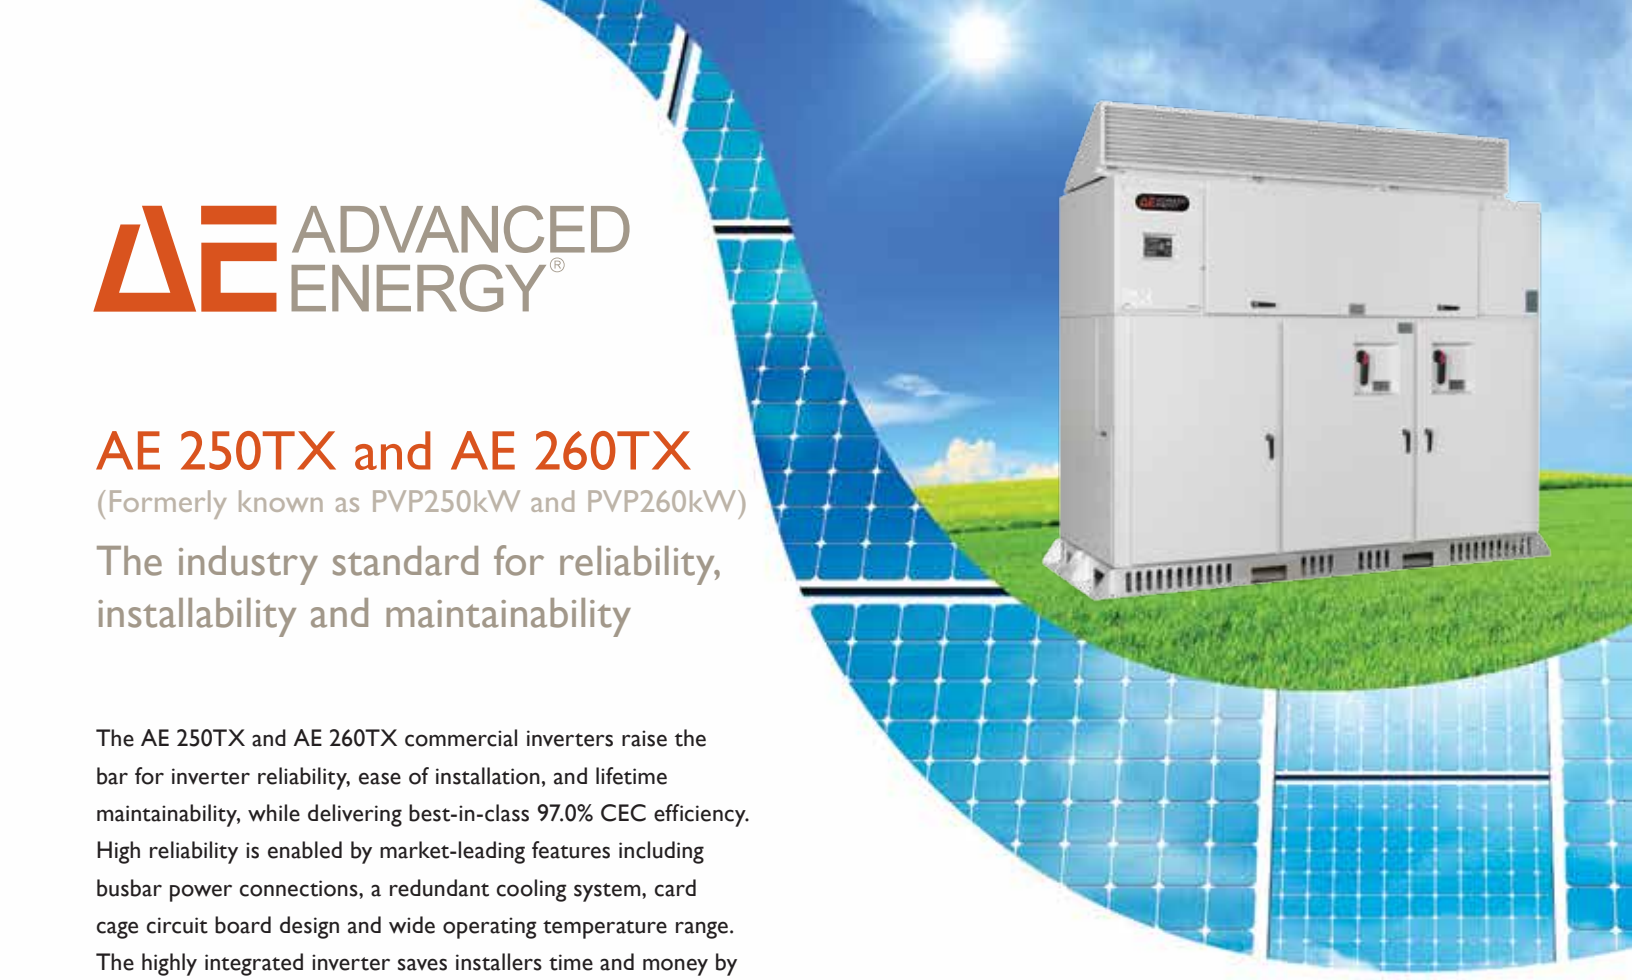

AE 250TX and AE 260TX

(Formerly known as PVP250kW and PVP260kW)

The industry standard for reliability, installability and maintainability

The AE 250TX and AE 260TX commercial inverters raise the bar for inverter reliability, ease of installation, and lifetime maintainability, while delivering best-in-class 97.0% CEC efficiency. High reliability is enabled by market-leading features including busbar power connections, a redundant cooling system, card cage circuit board design and wide operating temperature range. The highly integrated inverter saves installers time and money by including load break rated AC & DC service disconnects, neutral-free installation, oversized busbar landings and generous cable bending area with bottom and side cable entry options.

Communication interfaces, remote disable inputs, and optional 24 V auxiliary power supply are housed in a dedicated low power compartment for safe and easy access. Subcombiner fusing, a revenue grade meter, and performance monitoring gateway can be factory installed for a completely integrated inverter solution.

The AE 250TX and AE 260TX offer a wide 295-595 V operating window which maximizes energy harvest and provides exceptional stringing flexibility. AE Solar Energy inverters are engineered for reliability with more than 99% monitored fleet availability.

The AE 250TX and AE 260TX are backed with an industry-leading, 10-year, nationwide warranty and a comprehensive optional 20-year warranty; plus the most responsive service and support team in the business.

Superior Reliability

- Redundant cooling system with Smart Air Management™
- Increased availability with >99% monitored fleet availability
- Low parts count reduces potential failure points
- Engineered busbar power connections
- Card cage circuit board system minimizes eletronic interconnections

Exceptional Installability

- Bottom and side entry with generous bending area and oversized busbar landings
- Complete range of DC subcombiner fusing options
- Exterior mounting flanges for fast and easy anchoring with no pre-drilling

Easy to Maintain

- All maintenance and service via front and side access
- Fast change circuit board system shortens service time
- Load break rated AC and DC service disconnects
- Dedicated performance monitoring section

AE Solar Energy is a US based company.

ONTARIO FEED IN TARIFF
DOMESTIC CONTENT COMPLIANT

Dimensions - AE 250TX and AE 260TX

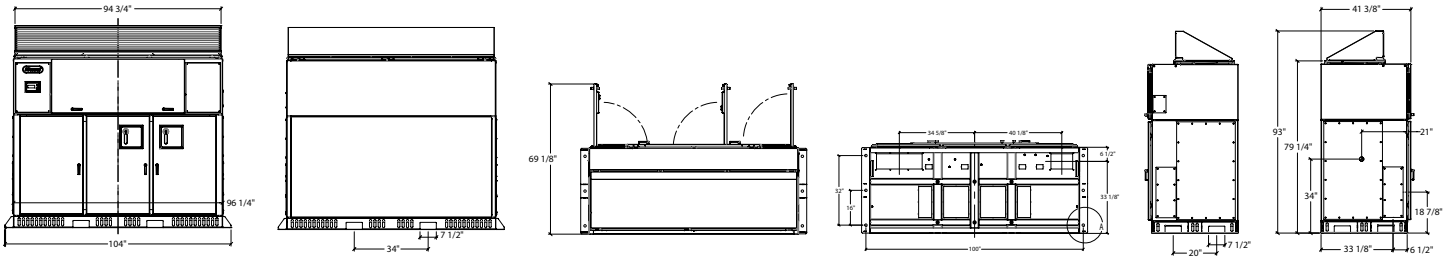

AE 250TX and AE 260TX Summary Specifications*

Mechanical	AE 250TX	AE 260TX
Weight	5000 lbs	5000 lbs
Construction	Powder Coated Steel	Powder Coated Steel, Optional Stainless Steel
Environmental Rating	NEMA 4	NEMA 4
Mounting	Pad Mount	Pad Mount
Isolation Transformer	Integrated	Integrated
Integrated AC/DC Disconnect	included	Included
AC and DC Surge Protection	Included	Included
Electrical		
DC Inputs		
Array Configuration	Positive or negative ground	Positive or negative ground
Maximum Operating Input Current	890 A	925 A
Maximum DC Input Voltage (VOC)	600 V	600 V
MPPT Voltage Range	295-595 V	295-595 V
Open-Circuit Turn-On Voltage	330 V	330 V
AC Output		
Continuous Output Power	249.5 kW	260 kW
Nominal Voltage	480 Y, 600 Y	480 Y
Operating Voltage Range	-12% / +10%	-12% / +10%
Electrical Service Compatibility	3 phase, 4 wire, grounded Wye	3 phase, 4 wire, grounded Wye
Maximum Continuous Current	480: 304 A 600: 243 A	316 A
Short Circuit Fault Current	480: 336 Arms @ 480 VAC, 60.3 ms 600: 269 Arms @ 600 VAC, 60.3 ms	336 Arms @ 480 VAC, 60.3 ms
Nominal Frequency	60 Hz	60 Hz
Frequency Range	59.3 - 60.5 Hz, adjustable to 57.0 Hz	59.3 - 60.5 Hz, adjustable to 57.0 Hz
Total Harmonic Distortion	< 3% THD	< 3% THD
Efficiency		
Efficiency: Peak/CEC	480: 97.7% / 96.5% 600: 97.7% / 96.5%	97.7% / 97.0%
Standby Losses	< 33 W	< 33 W
Inverter Controls and Monitoring		
Power Factor	> 0.99, adjustable to 0.9 leading or lagging	> 0.99, adjustable to 0.9 leading or lagging
Communication Interfaces and Protocols	RS-485, Ethernet, Modbus, TCP/IP	RS-485, Ethernet, Modbus, TCP/IP
Environmental		
Operating Ambient Temp. Range	-30 °C to 50 °C	-30 °C to 50 °C
Standby/Storage Ambient Temp. Range	-40 °C to 60 °C	-40 °C to 60 °C
Cooling	Forced Convection	Forced Convection
Relative Humidity	0 to 95%, non-condensing	0 to 95%, non-condensing
Elevation	6000 ft	6000 ft
Noise Emission	< 65 dBA, typical at full load	< 65 dBA, typical at full load
Regulatory		
Agency Approvals / Regulatory Compliance	UL 1741, IEEE 519, IEEE 929, IEEE 1547, CSA 107.1-1, FCC Class A	UL 1741, IEEE 519, IEEE 929, IEEE 1547, CSA 107.1-1, FCC Class A
Inverter Warranty	10 Year	10 Year

Subject to change without notice. Refer to user manual for detailed specification.
*Note: Not all performance window specifications can be achieved simultaneously. Performance varies per site.
Consult your AE sales or service representatives for specific PV system design questions at sales.support@aei.com.

Advanced Power Controls

- Power Factor
- Curtailment
- Controlled ramp rate
- Remote enable/disable

Options

- Integrated fused sub-array combiner with options from 4 to 20 fuses and 70 to 400 Amps
- Fused subcombiners with monitoring: 8 x 200 A, 16 x 100 A
- Integrated revenue grade meter
- Integrated data monitoring solutions
- 24 V auxiliary power supply
- Stainless Steel Enclosure
- 20-year extended warranty

Performance Monitoring

Increase uptime and reduce maintenance costs with integrated performance monitoring hardware that enables connectivity to a variety of software solutions from industry leading monitoring partners. The tight integration between AE Solar Energy and our monitoring partners creates a superior service and support experience while seamlessly delivering meaningful data. Factory integration and testing of our UL listed monitoring solution ensures high reliability and significantly reduces field installation costs.

AE Solar Energy • 20720 Brinson Blvd • Bend, OR 97701 U.S.A.
www.advanced-energy.com/solarenergy
877.312.3832 • sales.support@aei.com • invertersupport@aei.com
Please see www.advanced-energy.com for worldwide contact information.

© Advanced Energy Industries, Inc. 2012
All rights reserved. Printed in U.S.A.
ENG-AE250-260TX-250-07 11/12

Advanced Energy is a registered U.S. trademark of Advanced Energy Industries, Inc.

Schneider Electric GT250 Grid Tie Solar Inverters

Easy to install and operate, the Schneider Electric GT250 grid tie inverters automate startup, shut down and fault detection scenarios. They incorporate advanced Maximum Power Point Tracking technology to maximize the energy harvested from a PV array. To ensure reliability, the GT250 and their sub-components have been tested using Highly Accelerated Life Testing (HALT). Multiple inverters are easily paralleled for larger power installations.

Features

- Integrated design with isolation transformer
- Includes AC and DC disconnects
- Integrated ground fault detection and interruption
- Soft-start circuit to reduce nuisance trips
- Sensitive components are protected from the environment while heat generating components are in the cooling airflow
- Back and sides of unit designed for zero clearance installations to minimize inverter space requirements
- Wiring access points on bottom and sides of inverter
- Designed for fork lift or sling transportation
- Zinc primed and powder coated steel enclosure for maximum corrosion resistance
- Designed to help maximize reliability with film-type capacitors and bus bars in the power path
- Bright fluorescent green Vacuum display with UV cover for ease of reading in sunlight
- RS485/Modbus and RS232 communications
- Five-year standard warranty

Options

- PV Box solution with multiple inverters and medium voltage transformers
- Fused sub-array combiner integrated with the inverter enclosure
- Positive-ground configuration
- Remote monitoring and control options
- Preventative maintenance programs
- Warranty extensions and service contracts with uptime guarantees

ONTARIO FIT COMPLIANT

For more information about this product email
re.pvsales@schneider-electric.com

Schneider Electric

Schneider Electric GT250 Solar Inverters

ONTARIO FIT COMPLIANT

Device short name	GT250 480	GT250 600

Electrical specifications

Input (DC)

Photovoltaic power	260 kW	260 kW
Input voltage range, MPPT	300 to 480 V	310 to 480 V
Max. input voltage, open circuit	600 V	600 V
Max. input current	867 A	867 A
Max. input short circuit current	1214 A	1214 A
Utility backfeed current	0 A	0 A

Output (AC)

Nominal output power	250 kW	250 kW
Output voltage	480 V, three-phase ((line to line, +10%-12%)	600 V, three-phase (line to line, +10%-12%)
Frequency	60 Hz (+0.5 Hz / -0.7 Hz)	60 Hz (+0.5 Hz / -0.7 Hz)
Nominal output current	301 A	241 A
Power factor	> 0.99	> 0.99
Harmonic distortion	< 3% at rated power	< 3% at rated power
Topology	Isolation transformer standard and integrated within the inverter enclosure	

Efficiency

Peak	96.8%	96.8%
CEC weighted	96.0%	96.0%

General specifications

Power consumption, night time	< 100 W	< 100 W
NEMA degree of protection	Type 3R (outdoor rating)	Type 3R (outdoor rating)
Enclosure material	Zinc coated and powder coated steel	
Product weight	2018 kg (4450 lb)	2018 kg (4450 lb)
Product dimensions (H x W x D)	219.2 x 228.6 x 117.1 cm (86.3 x 90.0 x 46.1 in) (Removable air intake reduces depth by 12 in for fitting through doors)	219.2 x 228.6 x 117.1 cm 86.3 x 90.0 x 46.1 in) (Removable air intake reduces depth by 12 in for fitting through doors)
Ambient air temperature for operation	-15ºC to 50ºC (5ºF to 122ºF) available lower temperature option with space heaters	-35ºC to 45ºC (-31ºF to 113ºF)
Operating altitude	Up to 2012 m (6600 ft) without de-rating	
Relative humidity	0 to 95% non-condensing	0 to 95% non-condensing
Part number	1-153390-01*	820-0071-01-01

Features and options

Type of cooling	Forced convection cooling
Display type	Standard bright fluorescent green Vacuum display
Communication interface	Optional RS485/Modbus and RS232 communications interface kit
AC/DC disconnect	Standard and integrated within the inverter enclosure
Ground fault detection/interruption	Standard and integrated within the inverter enclosure
Sub-array combiner	Optional integrated with the inverter enclosure

Regulatory approvals

Safety	CSA certified to UL1741 Ed. 2, CSA 107.1-01
Interconnect	IEEE 1547

Specifications are subject to change without notice.
* Other options available upon request.

Make the most of your energy

Schneider Electric

© 2012 Schneider Electric. All rights reserved. Schneider Electric, and the Schneider Electric logo are trademarks or registered trademarks of the Schneider Electric group of companies. Other trademarks, registered trademarks and product names are the property of their respective owners, and are used herein for identification purposes only.

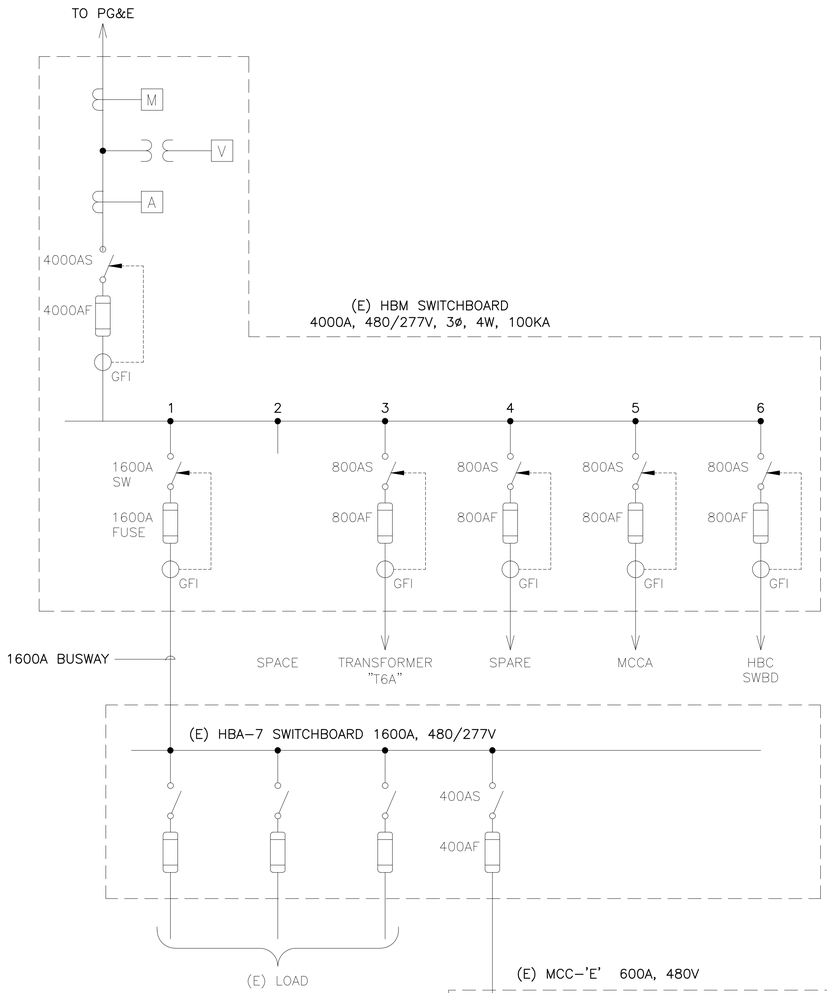

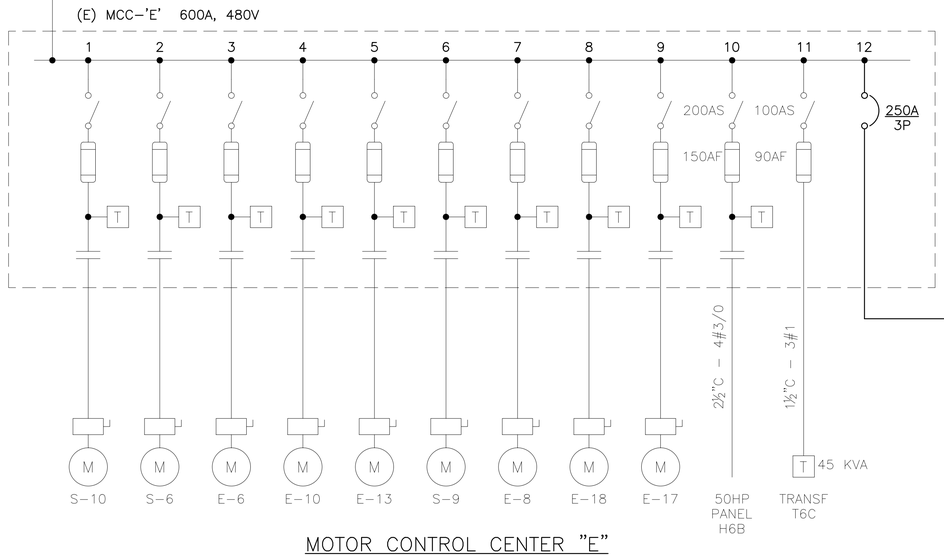

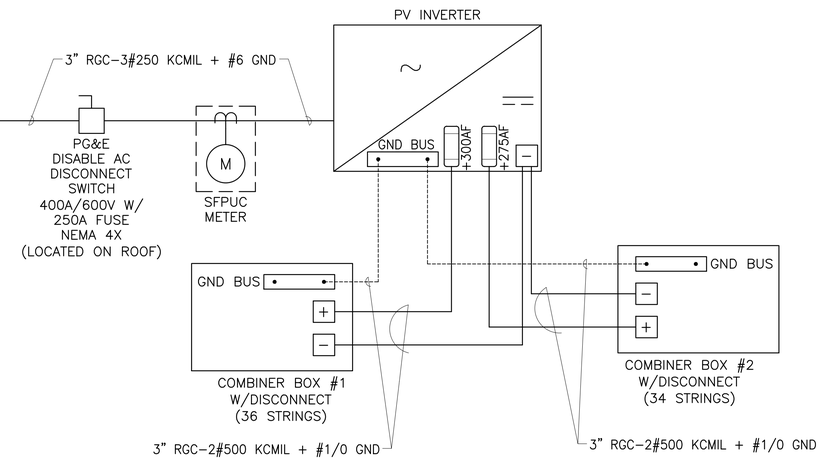
PV INVERTER
3" RGC-3#250 KCMIL + #6 GND
PG&E DISABLE AC DISCONNECT SWITCH 400A/600V W/ 250A FUSE NEMA 4X (LOCATED ON ROOF)
SFPUC METER
GND BUS
+300AF
+275AF
COMBINER BOX #1 W/DISCONNECT (36 STRINGS)
COMBINER BOX #2 W/DISCONNECT (34 STRINGS)
3" RGC-2#500 KCMIL + #1/0 GND
3" RGC-2#500 KCMIL + #1/0 GND

ELECTRICAL - (E) SINGLE LINE DIAGRAM

SCALE: NTS

(E) MCC-E 480V,600A (LOCATED IN ROOM M02)		
S-6 [1] [2]	E-13	E-17
S-10	S-9	PANEL H6B
E-6	E-8	TRANSFORMER T6C
E-10	E-18	SPACE
INCOMING	SPACE	SPACE [1]

SHEET NOTE:

[1] REMOVE (E) STARTER/BUCKET AND REINSTALL IN THE (E) SPACE SHOWN. PROVIDE WIRING AS NEEDED FOR S-6 FEEDER EXTENSION.

[2] PROVIDE A 250A BREAKER WITH (N) COVER DOOR IN THIS SPACE FOR CONNECTION PV AC OUTPUT FEEDER.

STRING CALCULATIONS/ADVANCED

PV MODULE:	E20-327-COM
NUMBER OF MODULES PER STRING	8
VOLTAGE PER MODULE (VMP) (1)	54.7 VDC
OPEN CIRCUIT VOLTAGE (VOC) (1)	64.9 VDC
VOLTAGE CORRECTION FACTOR (VC-NEC TABLE 690.7) OR VOC TEMP COEFFICIENT	-176.6MV/°C
SHORT CIRCUIT CURRENT PER MODULE (ISC) (1)	6.46A
MAX CIRCUIT CURRENT PER STRING (NEC 690.8.A.1) 6.46x1.25	8.08A
REQUIRED CONDUCTOR AMPACITY (NEC 690.8.B.1) 8.08x1.25	10.10A
FUSE SIZE	10A
CONDUCTOR CHOSEN	#10 PV CABLE
CONDUCTOR TEMPERATURE	90°
CONDUCTOR AMPACITY	40A
AMBIENT TEMP DERATING (NEC TABLE 310.16) (2)	0.91
CONDUCTOR DERATED AMPACITY	36.4A
LONGEST STRING DISTANCE	150 FT
WARMEST DAY VOLTAGE (# MODULES x VMP)	438 VDC
COOLEST DAY VOLTAGE (# MODULES x VOC x VC)	562 VDC
WORST CASE VOLTAGE DROP	0.8%
(1) BASED ON PANEL MANUFACTURER PUBLISHED DATA	
(2) BASED UPON RECORD HIGH AMBIENT TEMP (°F)	103°F
(3) BASED UPON RECORD LOW AMBIENT TEMP (°F)	23°F
NOTE: WEATHER DATA OBTAINED FROM WEATHER.COM	

COMBINER CALCULATIONS COMBINER BOX #1

PV MODULE:	E20-327-COM
NUMBER OF MODULES PER STRING	8
NUMBER OF STRINGS PER COMBINER	36
VOLTAGE PER STRING (1)	437.6 VDC
SHORT CIRCUIT CURRENT PER STRING (ISC) (1)	6.46A
REQUIRED CONDUCTOR AMPACITY (# STRINGSxISCx1.56) 36x6.46x1.56	362.8A
CONDUCTOR CHOSEN	500 KCMIL
CONDUCTOR RATED AMPACITY @ 75° DEG C	380A
CONDUCTOR TEMPERATURE	90° DEG
CONDUCTOR AMPACITY @ 90° DEG C	430A
AMBIENT TEMP DERATING (NEC TABLE 310.16) (2)	0.91
CONDUCTOR DERATED AMPACITY	391.3A
LONGEST CONDUCTOR DISTANCE FROM COMBINER #1 TO RECOMBINER BOX #1	100 FT
WORST CASE VOLTAGE DROP (%)	0.8%
(1) REFER TO STRING CALCULATIONS FOR MORE INFORMATION	
(2) BASED UPON RECORD HIGH AMBIENT TEMP (°F)	

COMBINER CALCULATIONS COMBINER BOX #2

PV MODULE:	E20-327-COM
NUMBER OF MODULES PER STRING	8
NUMBER OF STRINGS PER COMBINER	34
VOLTAGE PER STRING (1)	437.6 VDC
SHORT CIRCUIT CURRENT PER STRING (ISC) (1)	6.46A
REQUIRED CONDUCTOR AMPACITY (# STRINGSxISCx1.56) 34x6.46x1.56	342.6A
CONDUCTOR CHOSEN	500 KCMIL
CONDUCTOR RATED AMPACITY @ 75° DEG C	380A
CONDUCTOR TEMPERATURE	90° DEG
CONDUCTOR AMPACITY @ 90° DEG C	430A
AMBIENT TEMP DERATING (NEC TABLE 310.16) (2)	0.91
CONDUCTOR DERATED AMPACITY	391.3A
LONGEST CONDUCTOR DISTANCE FROM COMBINER #2 TO RECOMBINER #1	100 FT
WORST CASE VOLTAGE DROP (%)	0.8%
(1) REFER TO STRING CALCULATIONS FOR MORE INFORMATION	
(2) BASED UPON RECORD HIGH AMBIENT TEMP (°F)	

AEPC Group, LLC
DESIGN • CONSTRUCTION • MANAGEMENT
Northern California Office
5000 Executive Parkway, Suite 475
San Ramon, CA 94583
Telephone: 925-277-3050
Facsimile: 925-824-0102

TME
TENNEBAUM-MANNION ENGINEERS, Inc.
Structural Design and Engineering
414 Mason Street, suite 605
San Francisco, CA 94102
Ph. 415.772.9891
Fax. 415.772.9893

TRS
TECHNICAL ROOF SERVICES, INC.
Roof and Waterproofing Consultants
A CMG Group Company
2339 Stanwell Circle, Suite A
Concord, CA 94520-4873
Tel: (925) 356-7776
Fax: (925) 356-7776
www.cmgroup.com

JOB TITLE

PHOTOVOLTAIC (PV) PROJECT
201 Van Ness Ave. San Francisco, CA 94102

REVISIONS

-	-/-/13	A

STAMP

REGISTERED PROFESSIONAL ENGINEER
MUZAFFER ALI KHAN
E 17115
EXP. 9/30/13
ELECTRICAL
STATE OF CALIFORNIA

SHEET INFORMATION

Date	2/22/13
Job	SFPU-12120
Scale	NONE
Drawn	FMC
Checked By	AK

TITLE

ELECTRICAL SINGLE LINE DIAGRAM

SHEET

E5.1

OF SHEETS

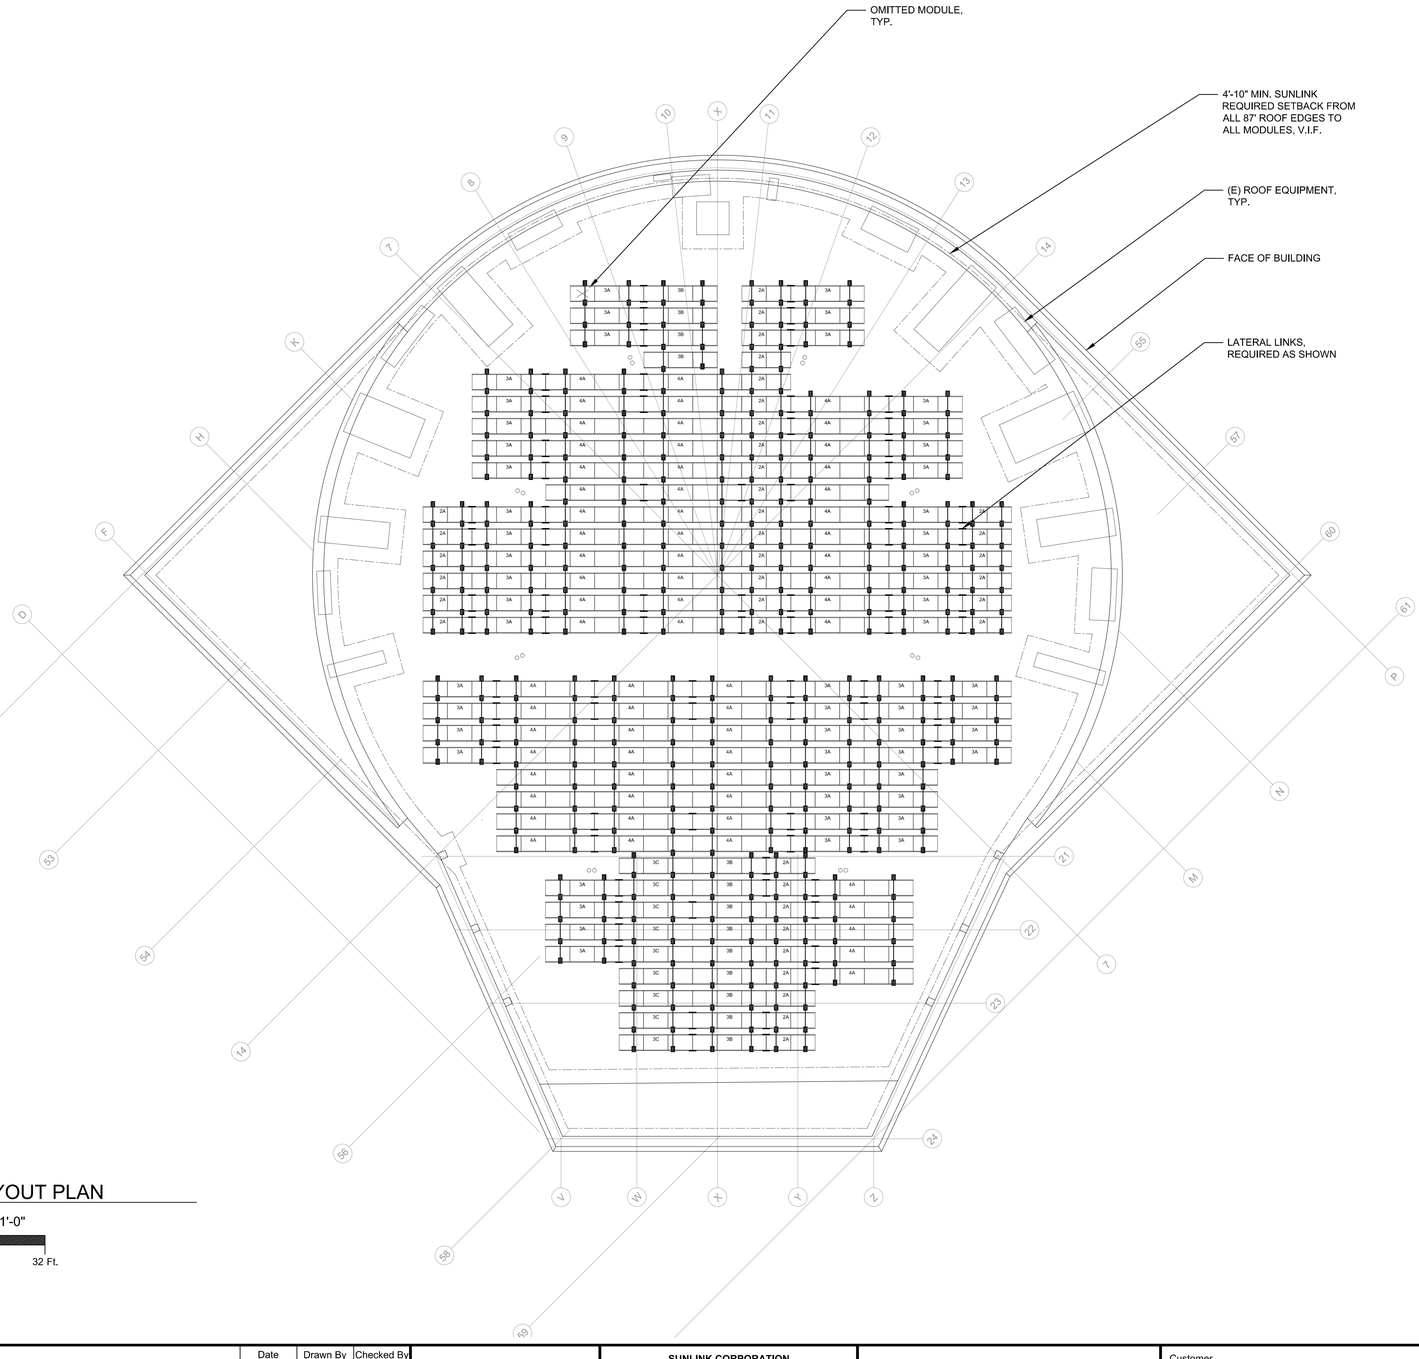
OMITTED MODULE, TYP.
4'-10" MIN. SUNLINK REQUIRED SETBACK FROM ALL 87' ROOF EDGES TO ALL MODULES, V.I.F.
(E) ROOF EQUIPMENT, TYP.
FACE OF BUILDING
LATERAL LINKS, REQUIRED AS SHOWN

ARRAY NORTH

TRUE NORTH

ARRAY LAYOUT PLAN

SCALE: 1/16" = 1'-0"

0 4 16 32 Ft.

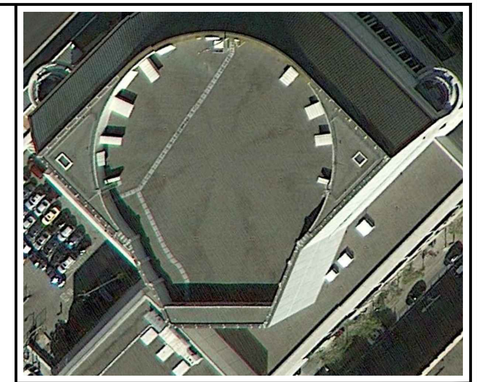

PROJECT INFORMATION			
Project Latitude	37° 46' 39.6" N	Roof Height (ft)	87
Project Longitude	122° 25' 14.5" W	Roof Area (ft^2)	-
ARRAY INFORMATION			
Module Number	71-105-02-008	Row Repeat Spacing (in)	56
Tilt Angle (°)	10	Foot Size (in)	14.35 x 2.20
Spacing Type	Custom		
ARRAY QUANTITIES			
4x1 Panels	64	Foot	403
3x1 Panels	77	Lateral Links	162
2x1 Panels	37	Long Beams	356
Omitted Modules	1		

General Notes:

1. These drawings show the required location of SunLink Precision RMS components for this project. The layout is based on existing conditions information provided to SunLink by the customer and has not been verified by SunLink. Verify key dimensions and existing conditions in the field prior to beginning installation.
2. Obtain SunLink approval before modifying the layout shown, or relocating, omitting, or modifying any SunLink component. Install all SunLink components per the latest edition of the SunLink assembly instructions available at sunlink.com.
3. Any additional installation requirements, such as roofing protection, electrical components, waterproofing, and connector attachment, are not by SunLink. Refer to other project documents.
4. The installer is responsible for worker safety and for maintaining a safe worksite.
5. Shading is calculated by SunLink based on information provided by the customer on December 22nd at project latitude.
6. For array weight and roof loading information, refer to the SunLink Structural Engineering Load Advisory provided for this project.
7. SunLink required 6" clearance between components on different sub-arrays and other rooftop equipment.

Array Plan Symbol Legend:

Module — Long Beam
Omitted Module — Lateral Link
Foot

Issue	Description	Date	Drawn By	Checked By
R0	Layout definition with Suniva 270 at 10 degrees	03-20-13	MG	-
R1	Background updated per customer file; Layout maxed out	04-04-13	MG	-
R2	Layout definition with Sunpower 327 at 10 degrees; String size and layout revised per cust. file	06-13-13	MG	-

SUNLINK CORPORATION
1010 B STREET, SUITE 400
SAN RAFAEL, CA 94901

(T) 415.925.9650 (F) 415.925.9636

WWW.SUNLINK.COM

© 2013 SunLink Corporation
The information on this drawing is proprietary to SunLink Corporation. It is provided on the condition that it is used only to facilitate the installation of the SunLink Photovoltaic Module Mounting System shown. Do not copy or distribute except for the use stated above.

Customer

Project

Location 201 Van Ness Avenue
San Francisco, CA 94102

PRECISION ROOF MOUNT SYSTEM

Module					
Sunpower E20-327-COM					
Tilt Angle	Wattage	No. of Modules	DC String Length	No. of Strings	Pwr. Output (DC)
10°	327	560	8	70	183.12 kW

Quote Reference No.	SLDS Ver.	Sheet Title		
	6.1.20	Array Layout Plan		
Sales Order No.	Template Ver.	Sheets	Issue	Sheet Number
-	6.0.4	2 of 4	R2	SL1.0

marcos gaxiola z:\projects\prospects\hot prospects\aepc group llc\10059\61-davieshallsf-061313-mg-r2.dwg